

Rubber Grommets for Catenary Fixing



Open / Cable Type Rubber Grommets. These grommets are used to protect cables or pipes passing through metal panels. They can be produced in many different types of rubber, for various industrial and anti-vibration purposes.




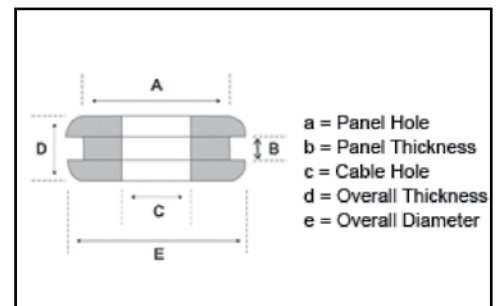
Specifications

Code	Material	Colour	Properties	Operating Temperature
ML-SLG-0003	Nitrile	Black	Oil, Petrol and Fuel Resisting	120°C to -40°C

The outstanding property of Nitrile rubber is its resistance to petroleum oils and aromatic hydrocarbons. Nitrile is highly resistant to mineral oils, vegetable oils, and many acids. It also has good elongation properties as well as adequate resilience, tensile and compression set.

Dimensions

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
11.1	4.8	7.9	11.4	15.8



NOTE:
Our Grommets MUST be split before use.



Unit 2, Farrington Place, Rossendale Road Ind. Est. Burnley, Lancashire. UK. BB11 5TY

T: 01282 448086

E: sales@maxiledlighting.com

Web: www.maxiledlighting.com