

MaxiLED
Lighting

MaxiBATCAP
STATIC WHITE



MaxiBATCAP

STATIC WHITE



Key Features

- IP68
- IK07 (Impact resistance)
- 5 year Warranty
- Single strand runs as long as 330 ft (100m)
- Static White
- Black Upper lens light shield. Frosted lower lens
- Operating temperatures -40°C to +50°C
- Vibration tested. ANSI C136.31

Description

MaxiBatcap is engineered for installations where upward light spill is simply not an option. Its solid upper hemisphere works as a fully integrated optical baffle, blocking the upper 180° and redirecting every lumen toward pedestrian level. The result is precise, glare-controlled illumination, purpose-built for waterfronts, bridges, marinas, dark-sky-compliant zones and heritage architecture where the night sky must be respected. Built on a 24VDC platform with IP68 UV-stabilised polycarbonate construction, MaxiLight Shield pairs surgical light control with the long-run durability expected from a permanent architectural festoon.

MaxiBATCAP

Specifications

Power input: **24VDC**

Watts per unit: **0.6w**

LED Current: **100ma**

Lumens Maintenance 85% : **70,000Hrs**

Certifications: **UL. UKCA. CE.**




Finishes



(MOQ)

Dimensions

MM (INCHES)

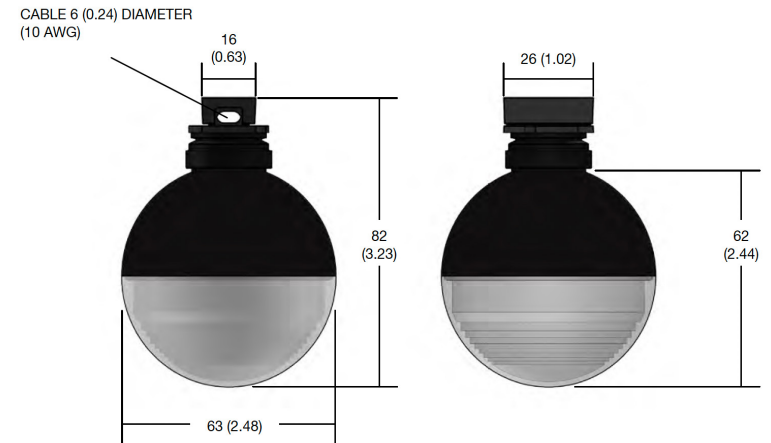

Certifications



MaxiLED
Lighting

MaxiBATCAP

Static White



MaxiLED Lighting

Unit 2, Farrington Place, Rossendale Road Ind. Est. Burnley, Lancashire. UK. BB11 5TY
T: +44 (0)1282 448086 E: sales@maxiledlighting.com Web: www.maxiledlighting.com