



MaxiLED Small Globe Static



MaxiLED Small Globe

Static



Key Features

- IP68
- IK07 (Impact resistance)
- 5 year Warranty
- 24V Low voltage
- 300+ Globes on a single power source
- Available in 2700K, 10,000K, Red, Green, Blue, Pink and Amber
- Available in Clear and Matt Lens
- Operating temperatures -40°C to +50°C
- Vibration tested. ANSI C136.31

Description

MaxiLED Small Globe strands deliver long runs of 32 mm globes to outline features in white or static colour. Built for permanent use, each strand uses injection-moulded polycarbonate globes, heavy-gauge cabling and sealed LED modules. Multiple static colours can be mixed on one strand. Small Globe – Static Colours (32 mm) delivers uniform colour along trees and landscapes. Running at 24V, it is rated IP68/ IK07, has a 5-year warranty, and supports 300+ globes per power source - ideal for long, continuous festoon runs with minimal infrastructure and consistent ambience.

MaxiLED Small Globe Static

Specifications

Power input: **24VDC**

Watts per unit: **0.6w**

LED Current: **100mA**

Lumens Clear Globe (2700K): **23**
(10,000K): **21**

LED's (Random): **2700K, 10,000K, Red, Green, Blue, Pink and Amber**

Maximum run distance: **100 Meters**

Maximum Globe per single power source: **300+**

Certifications: **UL, UKCA, CE.**


Dimensions



Features



Finishes

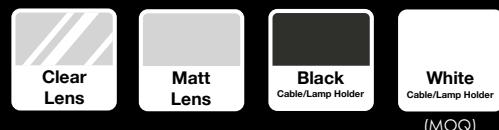

Certifications



MaxiLED Small Globe Static



MaxiLED Lighting

Unit 2, Farrington Place, Rossendale Road Ind. Est. Burnley, Lancashire. UK. BB11 5TY
T: **+44 (0)1282 448086** E: sales@maxiledlighting.com Web: www.maxiledlighting.com