

MaxiLED
Lighting



MaxiLANTERN
Static

MaxiLANTERN

Static



Key Features

- IP68
- IK07 (Impact resistance)
- 5 year Warranty
- 24V Low voltage
- 300+ Lanterns on a single power source
- Available in 2700K, 10,000K, Red, Green, Blue, Pink and Amber
- Available in Clear and Matt Lens
- Operating temperatures -40°C to +50°C
- Vibration tested. ANSI C136.31

Description

Maxiled lighting have developed the MaxiLANTERN Series into a unique patent pending easy installation system for low power DMX projects over any two wires 1.5 or 2.5sqmm cable. The DMX install is simply the same wiring as a static install. All drivers and control can be housed 75metres away from the lighting. Simple, clean and unique especially for any installer that is not experienced in DMX installs.

MaxiLANTERN Static

Specifications

Power input: **24VDC**

Watts per unit: **0.6w**

LED Current: **100mA**

Lumens Clear Lantern (2700K): **30**
(10,000K): **27**

LED's (Random): **2700K, 10,000K, Red, Green, Blue, Pink and Amber**

Maximum run distance: **100 Meters**

Maximum Lanterns per single power source: **300+**

Certifications: **UL, UKCA, CE.**

Features



IP68



IK07



80GRM



DIMMABLE



**STATIC
COLORS**



24V



**VIBRATION
ANSI C136.31**



**-40°C
+50°C**

Finishes



**Clear
Lens**



**Matt
Lens**





**Black
Cable/Lamp Holder**



**White
Cable/Lamp Holder**

(MOQ)

Dimensions

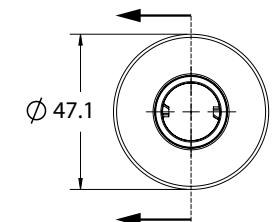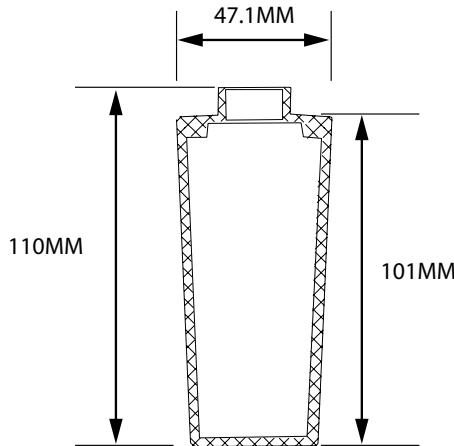

Certifications



MaxiLANTERN

Static



MaxiLED Lighting

Unit 2, Farrington Place, Rossendale Road Ind. Est. Burnley, Lancashire. UK. BB11 5TY
T: **+44 (0)1282 448086** E: sales@maxiledlighting.com Web: www.maxiledlighting.com