

## Key Features


- IP68 rating / Wet location
- Data over Power - 2 Core cable
- Compact design
- 48VAC
- UL Recognized



MaxiLINK® is used to control (via DMX-512) and power MaxiLED RGBW products such as the Focal Facade Series, Globe Series, Marker Effects Series, MaxiPUNCH Series and Spotlight Series.

On the input side, a DMX signal cable from any third party DMX controller or show design software is required, plus a 48VDC power supply is needed. Data and power (48VAC) are then output together to the MaxiLED RGBW products on one cable. A single MaxiLINK® controller is typically dedicated to an individual run (or strand).

## Dimensions

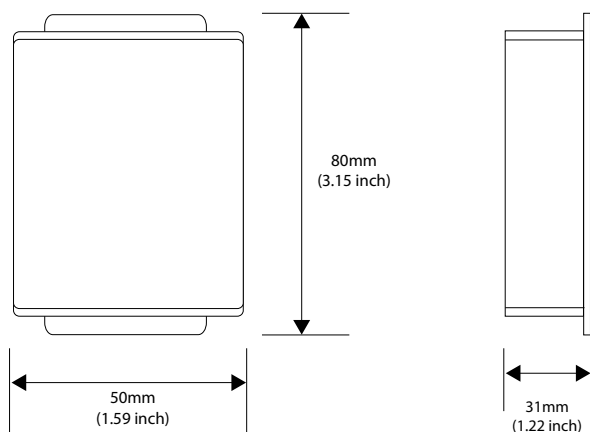

## Specifications

Power Input:	48VAC Data Over Power MaxiLINK® system
Power Output:	250W
Data Input:	DMX-512
Length:	80mm (3.15 Inch)
Width:	50mm (1.59 Inch)
Depth:	31mm (1.22 Inch)
Fixing:	4 external screw mounting position lugs
Protection:	Short circuit. Open circuit. Over temperature
Weight:	400g (14.1oz)
Connector:	Junction box UL Approved supplied by other.
Control:	DMX512
Operating Temperature:	-25°C to +50°C (-13°F to +122°F)
Listings:	UL Recognized
Capacity:	Each MaxiLINK® unit can control up to 100 RGBW control points (400 DMX channels) and power up to 305 ft (100m) of cable.



UK Designed and  
Manufactured

## MaxiLED Lighting

Unit 2, Farrington Place, Rossendale Road Ind. Est. Burnley, Lancashire. UK. BB11 5TY  
T: +44 (0)1282 448086

E: [sales@maxiledlighting.com](mailto:sales@maxiledlighting.com) Web: [www.maxiledlighting.com](http://www.maxiledlighting.com)