

MaxiLED
Lighting

MaxiLED Focal Facade
DMX White 4000K

MaxiLED Focal Facade

DMX White 4000K



Key Features

- IP68
- IK07 (Impact resistance)
- 5 year Warranty
- Single strand runs as long as 330 ft (100m)
- 512 DMX Controllable
- High Performance
- Available in Clear and Matt Lens

Description

The MaxiLED Focal Facade - DMX White High Output (4000 K) delivers long, continuous runs of white festoon lighting to outline trees, landscapes, buildings and bridges. Built for permanent use with rugged, injection-moulded polycarbonate globes, heavy-gauge cabling and dependable Cree® LEDs, the system runs on 48 VDC MaxiLINK Data-Over-Power for DMX512 dimming over two cores and is rated IP68 / IK07. Single-strand runs up to 100 m (max 100 fixtures). Available in clear or frosted globes.

MaxiLED Focal Facade

DMX White 4000K

Specifications

Power input: **48VAC**

Watts per unit: **2.35w**

LED Current: **100ma**

Lumens RGBW Clear Globe (Full On): **150**



Lumens RGBW Frosted Globe (Full On): **200**

Certifications: **UL. UKCA. CE.**

Features




Finishes



Finishes - Housing



Dimensions

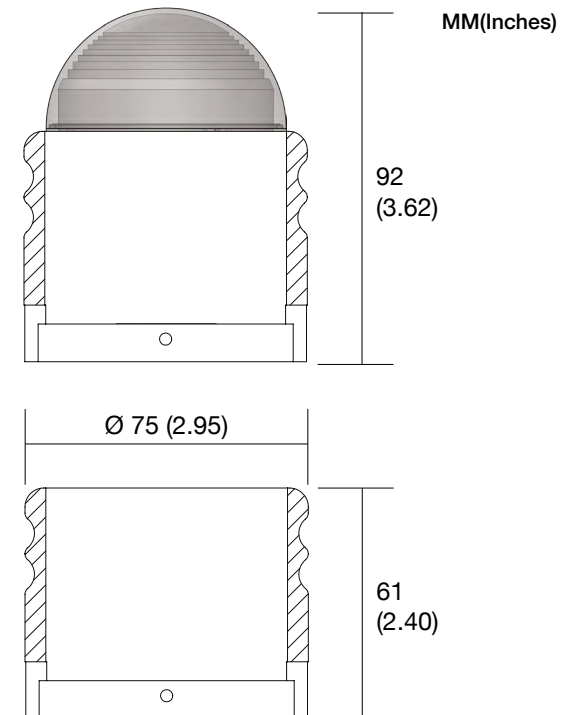

Certifications



MaxiLED
Lighting

MaxiLED Focal Facade DMX White 4000K



MaxiLED Lighting

Unit 2, Farrington Place, Rossendale Road Ind. Est. Burnley, Lancashire. UK. BB11 5TY
T: +44 (0)1282 448086 E: sales@maxiledlighting.com Web: www.maxiledlighting.com